

ORBIT 60 SERIES

Dynamic Input Modules

Datasheet

Bently Nevada Machinery Condition Monitoring

137M0698 Rev. C



Description

The primary purpose of the Dynamic Input module is to digitize the sensor signal at a rate that completely encompasses the signal content and provides transducer power for various sensors. The Orbit 60 Series Dynamic Input modules are a set of 4-channel input modules available in both negative and positive dynamic input options. The inputs are also used for speed or Keyphasor signals.



The PAV, PAS, PAA, PAD and PVT modules can be configured with up to TWO SPEED CHANNELS with a maximum speed of 12,000 rpm and maximum speed impulse rate of 12,000 cpm (200 Hz). For more than two speed channels on a single dynamic input card, speeds greater than 12,000 rpm or speed impulse frequencies greater than 12,000 cpm (200 Hz) a KPH Module is needed.

The Orbit 60 dynamic input modules are designed for use on a broad range of machine trains or individual casings where the sensor point count fits the monitor's channel count and where advanced signal processing is desired. The modules are optimized for intensive signal processing required on complex machinery such as gearboxes, planetary gearboxes, and roller element bearing (REB) machines as well as offering advanced measurement capabilities on conventional monitoring methods such as radial vibration, thrust position, and casing absolute vibration.



Negative Transducer Input Modules

The following cards work with negative-voltage external sensors offering four variants:

- **PAV** Negative Dynamic Sampler (Prox, Accel, Velom)
- **PAS** Negative Dynamic Sampler (Prox, Accel, Seismic)
- **PAA** Negative Dynamic Sampler (Prox, Accel, Aero)
- **PAD** Negative Dynamic Sampler (Prox, Accel, DC LVDT)
- **KPH** High Speed Keyphasor (Prox, Accel, Magnetic Pickup)



Positive Transducer Input Module

The Positive Voltage (PVT) input module interfaces with industry-standard third-party IEPE sensors, as well as sensors that use a 3-wire (power, common, signal) or a custom 2-wire (A/+ and B/-) positive-voltage interface.

The PVT is the preferred module to use for IEPE sensors, including the Bently Nevada Velomitor (3005xx) and IEPE accelerometers. Using the PVT modules for these sensors improves noise performance of the sensor.

- **PVT** Positive Dynamic Sampler (Prox, Accel, Velom)

The PVT module is recommended for new Velomitor installations only. Projects using the 190501 Velomitor CT or retrofits that reuse other existing Velomitor sensors should use the PAV module unless the user can verify the sensor power limits are appropriate for existing Velomiters.

Connectors



The Dynamic Input module uses an ix Industrial connection to provide access to four buffered transducer output (BTO) connectors for each of the dynamic channels, with short circuit protection. The ix Industrial connection is available on the public and utility side of the module.

Dynamic Input Modules



Dynamic Input Modules	
PAV	(-) (Prox, Accel, Velom)
PAS	(-) (Prox, Accel, Seismic)
PAA	(-) (Prox, Accel, Aero)
PAD	(-) (Prox, Accel, DC LVDT)
PVT	(+) (Prox, Accel, Velom)
Speed and Keyphasor	
Speed Range	1 - 12,000 rpm
Power Consumption	
Maximum	11 W
Typical (All Modules)	7.5 W
Accuracy and Frequency Response	
PAV	Prox/Accel (3-wire) 0-40 kHz 1% of Full Scale
	Velom (2-wire) 5 Hz - 20 kHz 1% of Full Scale 20-40 kHz 2% of Full Scale
PAS	Prox/Accel (3-wire) 0-40 kHz 1% of Full Scale Seismic (2-wire) 5 Hz - 20 kHz 1% of Full Scale 20-40 kHz 2% of Full Scale


Dynamic Input Modules	
PAA	Prox/Accel (3-wire) 0-40 kHz 1% of Full Scale Aero (4-wire) 5 Hz - 20 kHz 1% of Full Scale 20-40 kHz 2% of Full Scale
PAD	Prox/Accel (3-wire) 0-40 kHz 1% of Full Scale DC LVDT (4-wire) 5 Hz - 20 kHz 1% of Full Scale 20-40 kHz 2% of Full Scale
PVT	Prox/Accel (3-wire) 0-40 kHz 1% of Full Scale Velom (2-wire) 5 Hz - 20 kHz 1% of Full Scale 20-40 kHz 2% of Full Scale
Dynamic Inputs	
Analog Input	See Input Module Sensors and Channels on page 8.
Channels Supported	4 Dynamic Inputs
Sampling Rate	102.4 kHz
Input Interface Impedance (Typical)	
PAV	Prox/Accel (3-wire) 10 kΩ
PAS	Prox/Accel (3-wire) 10 kΩ Seismic (2-wire) 10 kΩ

Dynamic Input Modules	
PAA	Prox/Accel (3-wire) 10 k Ω Aero (4-wire) 100 k Ω
PAD	Prox/Accel (3-wire) 10 k Ω DC LVDT (4-wire) 1 M Ω
PVT	Prox/Accel (3-wire) 10 k Ω
Input Interface Signal Range [V]	
PAV	Prox/Accel (3-wire) Min. -22, Max. 0 Velom (2-wire) Min. -24, Max. -2
PAS	Prox/Accel (3-wire) Min. -22, Max. 0 Seismic (2-wire) Min. -14, Max. 0
PAA	Prox/Accel (3-wire) Min. -22, Max. 0 Aero (4-wire) Min. -22, Max. 0
PAD	Prox/Accel (3-wire) Min. -22, Max. 0 DC LVDT (4-wire) Min. -10, Max. 10

Dynamic Input Modules	
PVT	Prox/Accel (3-wire) Min. 0, Max. 24 Velom (2-wire) Min. 2, Max. 24
Outputs	
BTO Accuracy	AC > 0 to < 10 kHz, $\pm 1\%$ of input signal 10 kHz to < 20 kHz, $\pm 2\%$ of input signal 20 kHz to < 30 kHz, $\pm 4\%$ of input signal 30 kHz to ≤ 40 kHz, $\pm 6\%$ of input signal DC ± 100 mV over voltage range of Input Module
BTO Output Impedance	500 Ω
BTO Connector	
<div>  This is a true analog signal from the input, not digital to analog reconstitution of the input signal. Some Transducers have an offset BTO bias. </div>	
Transducer Power	
PAV	Prox/Accel (3-wire) -24 VDC, Max. 40 mA Velom (2-wire) 3.3 mA (Constant current)

Dynamic Input Modules	
PAS	Prox/Accel (3-wire) -24 VDC, Max. 40 mA
PAA	Prox/Accel (3-wire) -24 VDC, Max. 40 mA Aero (4-wire) -24 VDC, Max. 40 mA
PAD	Prox/Accel (3-wire) -24 VDC, Max. 40 mA DC LVDT (4-wire) -10 to 10 VDC, max. 40 mA
PVT	Prox/Accel (3-wire) 24 VDC, Max. 33 mA Velom (2-wire) 9.5 mA (Typical)
LEDs	
Channel Status LED (Rear Utility side only)	1 per input channel indicates when the connected sensor is in an OK condition
Module OK LED	Indicates when the module is functioning properly
System Communication LED	indicates when the module is communicating to the rest of the system
Physical	
Required Rack Space	1 Slot

Environmental Limits	
Chassis Operating Temperature Range (indoor use only)	3U Chassis: -30°C to +70°C (-22°F to 158°F) 
Module Temperature Rating Certification	-30°C to +70°C (-22°F to 158°F) <div> When using a Bridge module, temperatures over 58°C (136°F) require forced air convection with a minimum airspeed of 0.5 m/s.</div>
Storage Temperature Range	-40°C to +85°C (-40°F to 185°F)
Relative Humidity	0% to 95% rH non-condensing operating and storage
Vibration	Without Isolators: 0 g to 0.35 g @ 57-500 Hz With Isolators: 0 g to 5 g @ 57-500 Hz
Shock	2" Incline Drop

Environmental Limits	
Altitude	<p>< 2000 m (6,562 ft)</p> <div>  <p>Higher altitudes are possible but are site specific applications. Contact Bently Nevada support if you require higher altitudes.</p> </div>
Pollution Degree	Pollution Degree 2
Installation Category	Category II



Verify that temperature ratings on the wiring cables match the operating temperature range.



CAUTION



LOCATION TEMPERATURE AND HUMIDITY

If you install the hardware in a location where temperatures may exceed 40° C (104° F) or in excessive humidity, you should consider supplying environmental controls. High temperatures will reduce the operational life of the system.

Compliance and Certifications

FCC

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference.
- This device must accept any interference received, including interference that may cause undesired operation.

EMC

European Community Directive:

EMC Directive 2014/30/EU

Standards:

EN 61000-6-2; Immunity for
Industrial Environments
EN 61000-6-4; Emissions for
Industrial Environments

Electrical Safety

European Community Directive:

LV Directive 2014/35/EU

Standards:

EN 61010-1;
EN 61010-2-201;

RoHS

European Community Directive:

RoHS Directive 2011/65/EU

Cyber Security

Designed to meet IEC 62443-4-2

*Maritime

ABS Rules for Condition of Classification,
Part 1

- Steel Vessels Rules
- Offshore Units and Structures

* Approvals pending

Functional Safety

SIL 2

See the SIL User Guide (134M0398) for
details regarding SIL implementation.

Hazardous Area Approvals



For the detailed listing of country and
product-specific approvals, refer to
the [Approvals Quick Reference Guide](#)
(108M1756).

For additional technical
documentation, please log in to
bntechsupport.com and access the
Bently Nevada Media Library.

cNRTLus

Class I, Zone 2: AEx/Ex ec nC IIC T4 Gc;
Class I, Zone 2: AEx/Ex nA nC IIC T4 Gc;
Class I, Division 2, Groups A, B, C, D T4;
Class I, Division 2, Groups A, B, C, D T4
(N.I.);

T4 @ Ta= -30°C to +70°C (-22°F to +158°F)

ATEX/IECEx



II 3 G
Ex ec nC IIC T4 Gc
Ex nA nC IIC T4 Gc

T4 @ Ta= -30°C to +70°C (-22°F to +158°F)

Input Module Sensors and Channels

Sensor Type Supported	Channel Type	Dynamic Input Module Type (4 channels)							Static Input Module Type (6 channels)	
		PAV	PAS	PAA	PAD	PVT	KPH	AC LVDT	Temp	PVD
Proximator (3-wire)	Differential Expansion, Radial Vibration, Speed, Thrust, Recip Piston Rod	X	X	X	X	X	X			
Magnetic Pickups	Speed						X			
Accelerometer (3-wire)	Acceleration ¹ , Recip Impulse Acceleration	X	X	X	X	X ²	X			
Charge Amplifier (3-wire)	Acceleration ¹	X	X	X	X ²	X ²	X			
Interface Modules (4-wire)	Acceleration ¹			X						
High-Temp Accel (4-wire)	Acceleration ¹			X						
High-Temp Accel (3-wire)	Acceleration ¹	X	X	X	X	X ²	X			
Negative Biased Constant Current (2-wire)	Acceleration ¹	X								
IEPE Positive Constant Current (2-wire)	Acceleration ¹ , Recip Impulse Acceleration					X				
High-Temp Velocity	Velocity ¹	X	X	X		X ²				
Negative Biased Constant Current (2-wire)	Velocity ¹	X								
Velomitor® (2-wire)	Velocity ¹	X ³				X ^{2, 3}				
Velomitor CT	Velocity ¹	X								
Seismoprobe (2-wire)	Velocity ¹		X							
IEPE Positive Constant Current (2-wire)	Velocity ¹	X ³				X				
Amplifier/Interface Modules	Dynamic Pressure			X						

Sensor Type Supported	Channel Type	Dynamic Input Module Type (4 channels)							Static Input Module Type (6 channels)	
		PAV	PAS	PAA	PAD	PVT	KPH	AC LVDT	Temp	PVD
Pressure Transducers	Dynamic Pressure					X				
DC LVDT	Valve Position & Case Expansion				X					
AC LVDT	Valve Position & Case Expansion							X		
3-wire RTD	Temperature								X	
TC - Type J, K, E, T	Temperature								X	
4-20 mA Transmitter, ±10 V Sensor	Process Variable									X
Dry or Wet Contact, TTL Logic	Discrete Channel									X

¹ Designates the ability to integrate these measurements to provide additional measurement types.

² These sensors can be configured using a Custom transducer configuration.

³ PVT modules are recommended for new installations only. Projects using the Velomitor CT or retrofits that reuse existing sensors should use PAV or verify sensor power limits.



The PVT is only for positively biased sensors.



The Velomiters® and IEPE sensors can be configured on the PAV as a custom transducer.

Ordering Information



For the detailed listing of country and product-specific approvals, refer to the [Approvals Quick Reference Guide \(108M1756\)](#).

For additional technical documentation, please log in to bntechsupport.com and access the Bently Nevada Media Library.

PAV (Prox/Accel/Vel) Module

Ordering Option	Description
60R/INP01-AAA-B	
AAA – Hazardous Area Certifications	
00	No Hazardous Area
01	CSA/NRTL/C (Class I, Div 2)
02	Multi (CSA, ATEX, IECEx)
XXX	Country Specific Approvals
B – SIL Level	
0	No SIL
2	SIL 2

PAA (Prox/Accel/Aero) Module

Ordering Option	Description
60R/INP02-AAA-B	
AAA – Hazardous Area Certifications	
00	No Hazardous Area
01	CSA/NRTL/C (Class I, Div 2)
02	Multi (CSA, ATEX, IECEx)
XXX	Country Specific Approvals

Ordering Option	Description
B – SIL Level	
0	No SIL
2	SIL 2

PAS (Prox/Accel/Seismic) Module

Ordering Option	Description
60R/INP03-AAA-B	
AAA – Hazardous Area Certifications	
00	No Hazardous Area
01	CSA/NRTL/C (Class I, Div 2)
02	Multi (CSA, ATEX, IECEx)
XXX	Country Specific Approvals
B – SIL Level	
0	No SIL
2	SIL 2

PAD (Prox/Accel/DCLVDT) Module

Ordering Option	Description
60R/INP04-AAA-B	
AAA – Hazardous Area Certifications	
00	No Hazardous Area
01	CSA/NRTL/C (Class I, Div 2)
02	Multi (CSA, ATEX, IECEx)
XXX	Country Specific Approvals

B – SIL Level

0	No SIL
2	SIL 2

PVT (Prox/Accel/Velom)

Ordering Option	Description
60R/INP05-AAA-B	
AAA – Hazardous Area Certifications	
00	No Hazardous Area
01	CSA/NRTL/C (Class I, Div 2)
02	Multi (CSA, ATEX, IECEx)
XXX	Country Specific Approvals

B – SIL Level

0	No SIL
2	SIL 2

Accessories

Part Number	Description
60X/BTC01	Buffered Transducer Breakout Kit

External Barriers

Part Number	Description
175502	3-pin Transducer Barrier
177241	2-pin Velomitor Barrier
175990 or 170M3559	Thermocouple Barrier
170M3559	RTD Barrier

External Galvanic Isolators

Part Number	Description
103M7134	3-pin Transducer Isolator
103M7134	2-pin Transducer Isolator
154M1361	Thermocouple Isolator
103M7138	RTD Isolator


Dynamic Input Module Layout

PAV




Public Side – Utility Side

PAA

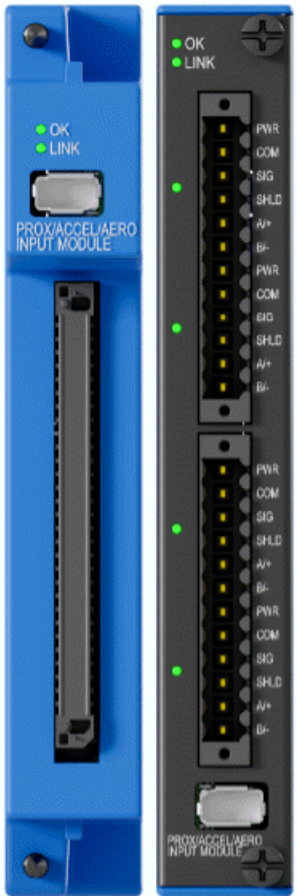

Public Side – Utility Side

PAS

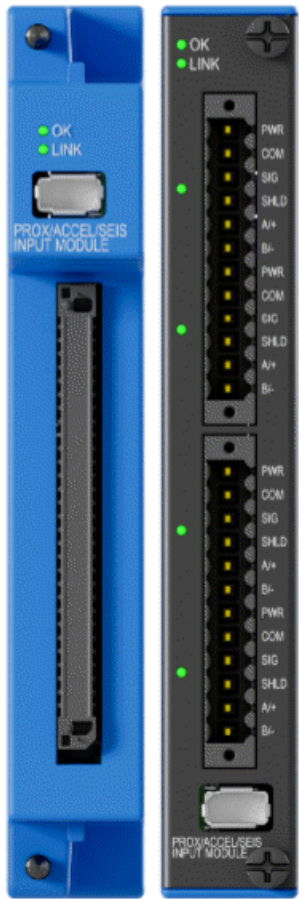


Public Side - Utility Side

PAD



Public Side - Utility Side

PVT

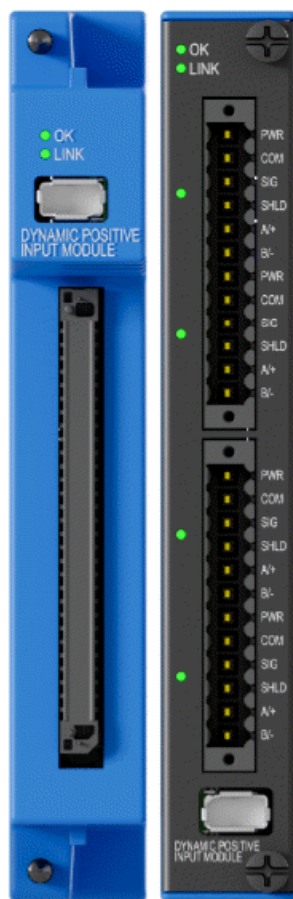

Public Side – Utility Side

Negative Dynamic Sensor Interfaces

These modules accept one to four sensor inputs.

Radial Vibration, Thrust and Speed Measurements	
3300 5 mm, 5M	Proximity Transducer System
3300 5 mm, 9M	Proximity Transducer System
3300 8 mm, 5M	Proximity Transducer System
3300 8 mm, 9M	Proximity Transducer System
3300 HTPS	High Temperature Proximity System
3300 RAM	Radiation Resistant Proximity Transducer
3300 (0.3 in - 15 ft)	Radiation Resistant Proximity Transducer
3300 (0.3 in - 40 ft)	Radiation Resistant Proximity Transducer
3300 RAD (0.3 in - 110 ft)	Radiation Resistant Proximity Transducer
3300 (0.42 in - 15 ft)	Radiation Resistant Proximity Transducer
7200 5 mm	Proximity System
7200 8 mm	Proximity System
7200 11 mm	Proximity System
7200 14 mm	Proximity System
3300XL NSV	Proximity System
3300XL 5 mm, 5M	Proximity System

Radial Vibration, Thrust and Speed Measurements	
3300XL 5 mm, 9M	Proximity System
3300XL 8 mm	Proximity System
3300XL 8 mm, 9M	Proximity System
3300XL 11 mm	Proximity System
Magnetic Pickup (MPU)	General Magnetic Pickup Speed Sensor (Supported only on Keyphasor Input Module)
Custom Proximator	Allows User Definition

Acceleration Measurements	
200350	Accelerometer
200355	Accelerometer
23733-03	Accel I/F Module
24145-02	High-Freq Accel I/F Module
330400	100 mV/g Accelerometer
330425	25 mV/g Accelerometer
330450	High Temp Accelerometer
350501	Acceleration Charge Amplifier
350900	HTVAS High Temp Velocity and Accel Sensor
3700300	Accelerometer
86517	Accel Interface Module
Custom	Allows User Definition

Velocity Measurements	
9200	Seismoprobe

Velocity Measurements	
74712	High Temp Seismoprobe
47633	Seismoprobe
86205	Velocity Transducer (Mag coil design)
190501	Velomitor
330500	Velomitor
330505	Low Freq Velocity Sensor
330525	Velomitor
330530	Radiation Resistant Velomitor
330750	High Temp Velocity Sensor
330752	High Temp Velocity Sensor
350900 HTVAS	High Temp Velocity & Accel Sensor
86517	Accelerometer Interface Module
Custom Seismoprobe	Allows User Definition
Custom	Allows User Definition

Dynamic Pressure Measurements	
86517 with MOD 159840	Dynamic Pressure Interface Module
165855	Cylinder Pressure Transducer
350300	Pressure Dynamic Sensor
350500	Dynamic Pressure Charge Amplifier
Custom Pressure Sensor	Allows User Definition

Case Expansion and Valve Position Measurements	
3300XL RPT	Rotary Position Transducer System (Valve Position Only)
24765-01 DC LVDT	DC Linear Variable Differential Transformer (PAD Only)
24765-02 DC LVDT	DC Linear Variable Differential Transformer (PAD Only)
24765-03 DC LVDT	DC Linear Variable Differential Transformer (PAD Only)
135613-01 High Temperature DC LVDT	DC Linear Variable Differential Transformer (PAD Only)
135613-11 High Temperature DC LVDT	DC Linear Variable Differential Transformer (PAD Only)
135613-02 High Temperature DC LVDT	DC Linear Variable Differential Transformer (PAD Only)
135613-12 High Temperature DC LVDT	DC Linear Variable Differential Transformer (PAD Only)

Case Expansion and Valve Position Measurements	
135613-03 High Temperature DC LVDT	DC Linear Variable Differential Transformer (PAD Only)
135613-13 High Temperature DC LVDT	DC Linear Variable Differential Transformer (PAD Only)
18639-01 +/-0.5in AC LVDT	AC Linear Variable Differential Transformer (AC LVDT Module Only)
18639-02 +/-1 in AC LVDT	AC Linear Variable Differential Transformer (AC LVDT Module Only)
18639-03 +/-0.531 in AC LVDT	AC Linear Variable Differential Transformer (AC LVDT Module Only)
18639-04 +/-6in AC LVDT	AC Linear Variable Differential Transformer (AC LVDT Module Only)
18639-05 +/-2in AC LVDT	AC Linear Variable Differential Transformer (AC LVDT Module Only)

Case Expansion and Valve Position Measurements	
18639-06 +/-3in AC LVDT	AC Linear Variable Differential Transformer (AC LVDT Module Only)
18639-07 +/-5in AC LVDT	AC Linear Variable Differential Transformer (AC LVDT Module Only)
18639-08 +/-10in AC LVDT	AC Linear Variable Differential Transformer (AC LVDT Module Only)
18639-09 +/-4in AC LVDT	AC Linear Variable Differential Transformer (AC LVDT Module Only)
Custom Proximitors	Allows User Definition (Case Expansion Only)

Differential Expansion	
3300 5mm, 5M	Proximity Transducer System
3300 5mm, 9M	Proximity Transducer System
3300 8mm, 5M	Proximity Transducer System
3300 8mm, 9M	Proximity Transducer System

Differential Expansion	
3300 HTPS	High Temperature Proximity System
7200 5mm	Proximity Transducer System
7200 8mm	Proximity Transducer System
7200 11mm	Proximity Transducer System
7200 14mm	Proximity Transducer System
3300XL 5mm, 5M	Proximity Transducer System
3300XL 5mm, 9M	Proximity Transducer System
3300XL 8mm, 5M	Proximity Transducer System
3300XL 8mm, 9M	Proximity Transducer System
3300XL 11mm	Proximity Transducer System
3300XL 25mm	Proximity Transducer System
3300XL 50mm	Proximity Transducer System
Custom Proximator	Allows User Definition
Recip Piston Rod	
3300 XL 8 mm	Proximity Probe
3300 XL 11 mm	Horizontal and Vertical Proximity Probe
Custom	3-Wire Transducers
Recip Impulse Acceleration	
330400	Accelerometer
330425	Accelerometer
Custom	Transducers

Custom Transducers

Custom transducers are software configurable within the following ranges:

Custom Transducers	
Scale factor	1mv/Eng Unit to 2000 mv/Eng Unit
Input voltage range	<u>PVT</u> +0 V to +23 V <u>All other modules</u> +0 V to -23 V
OK checking voltage range	<u>PVT</u> +0 V to +23 <u>All other modules</u> +0 V to -23 V
Engineering units	Selection from standard units table or custom unit entry
350900	HTVAS
47633	Velocity Seismoprobe
86205	Velocity Transducer
350500	Pressure Mod
86517	Custom Input

Temperature Input Module

This module accepts up to six sensor inputs.

Temperature Measurements	
ThermoCouple - Type-J	ThermoCouple
ThermoCouple - Type-K	ThermoCouple

Temperature Measurements	
ThermoCouple - Type-E	ThermoCouple
ThermoCouple - Type-T	ThermoCouple
3-Wire 100 Ω Platinum (0.00392) RTD	Resistive Temperature Detector
3-Wire 100 Ω Platinum (0.00385) RTD	Resistive Temperature Detector
3-Wire 10 Ω Copper RTD	Resistive Temperature Detector
3-Wire 120 Ω Nickel RTD	Resistive Temperature Detector

PVD Input Module

This module accepts up to six sensor inputs.

Discrete and Process Variables	
4-20 mA Transducer Output	Process Variable (PV)
1-5 V Transducer Output	Process Variable or Discrete
0-10 V Transducer Output	Process Variable or Discrete
-10 V-10 V Transducer Output	Process Variable (PV)

Copyright 2023 Baker Hughes Company. All rights reserved.



Bently Nevada, Keyphasor, Proximitar, Seismoprobe, Velomitor and Orbit Logo are registered trademarks of Bently Nevada, a Baker Hughes business, in the United States and other countries. The Baker Hughes logo is a trademark of Baker Hughes Company. All other product and company names are trademarks of their respective holders. Use of the trademarks does not imply any affiliation with or endorsement by the respective holders.

Baker Hughes provides this information on an "as is" basis for general information purposes. Baker Hughes does not make any representation as to the accuracy or completeness of the information and makes no warranties of any kind, specific, implied or oral, to the fullest extent permissible by law, including those of merchantability and fitness for a particular purpose or use. Baker Hughes hereby disclaims any and all liability for any direct, indirect, consequential or special damages, claims for lost profits, or third party claims arising from the use of the information, whether a claim is asserted in contract, tort, or otherwise. Baker Hughes reserves the right to make changes in specifications and features shown herein, or discontinue the product described at any time without notice or obligation. Contact your Baker Hughes representative for the most current information.

The information contained in this document is the property of Baker Hughes and its affiliates; and is subject to change without prior notice. It is being supplied as a service to our customers and may not be altered or its content repackaged without the express written consent of Baker Hughes. This product or associated products may be covered by one or more patents. See [Bentley.com/legal](https://www.bentley.com/legal).

1631 Bently Parkway South, Minden, Nevada USA 89423
Phone: 1.775.782.3611 (US) or [Bentley.com/support](https://www.bentley.com/support)
[Bentley.com](https://www.bentley.com)